


# TECHNICAL SPECIFICATION

MODEL NO: A-1359A (ARC-1359A)

## 2 In 4 Out Toslink Audio Switcher/Splitter



- High audio sample rate support.
- Provide 2 different of audio input for customer choose.

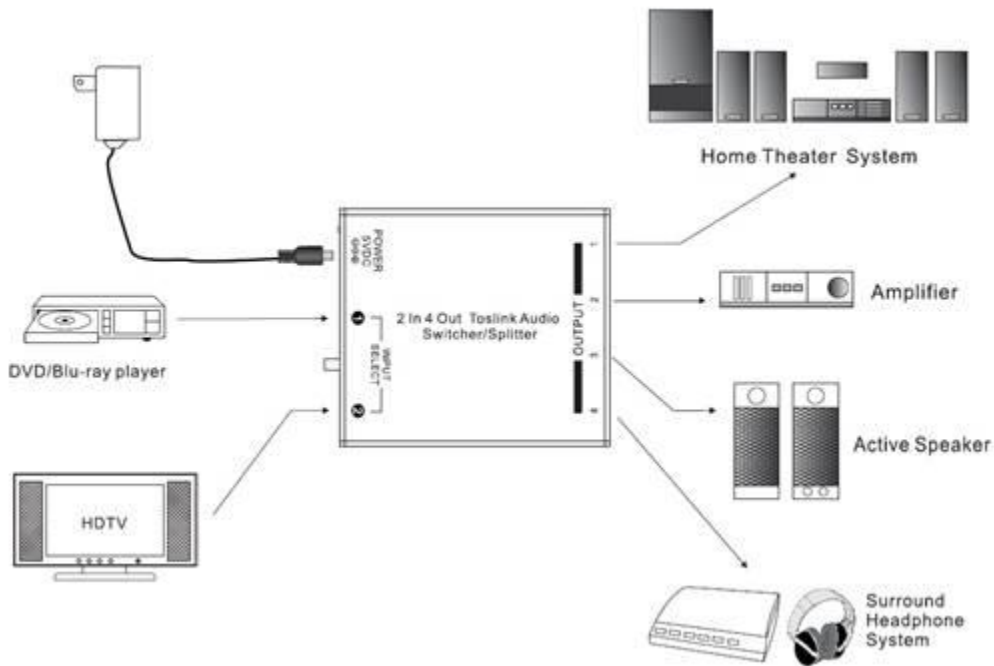

## Features

1. Supports digital audio signal (Coaxial/Optical) input and 4 optical outputs
2. Built-in audio amplifier ensures loss-less signal integrity.
3. Supports 2CH LPCM audio signal (sampling rate up to 192kHz)
4. Supports Dolby and DTS audio signal
5. Supports sampling rate from 32kHz to 192kHz
6. Easy to install and simple to operate
7. Suitable for home or professional audio distribution
8. Low power consumption

## Specifications

1. Input ports: 1 x Coaxial & 1 x Toslink (Optical Fiber)
2. Output ports: 4 x Toslink (Optical Fiber)
3. Audio Sampling Rate: 32 ~ 192 kHz
4. Audio Format: LPCM 2CH, Dolby Digital 2~5.1CH, and DTS 2~5.1CH
5. Power Source: DC 5 V/1A
6. Dimensions: 78 L x 64 W x 29 H mm
7. Weight: 53 g