


PRODUCT SPECIFICATION

DESCRIPTION

Stranded Plain Annealed Copper Wire, 4 Cores,
FR PVC Insulation, Rip Cord, FR PVC Sheath.
CM / CL3 compliant

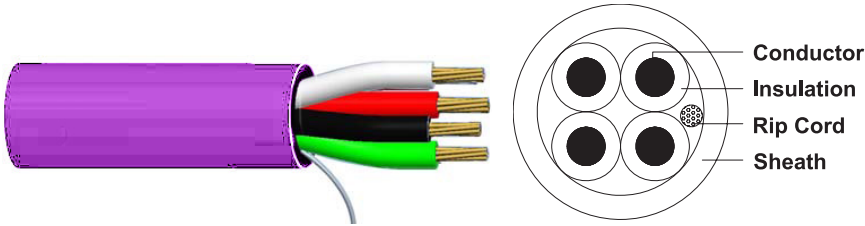

Conductor
Insulation
Rip Cord
Sheath

CONSTRUCTION

Conductor	
Material :	Plain Annealed Copper Wire
Size :	14AWG
Construction :	Stranded (41/0.25mm)
Insulation	
Material :	FR PVC
Nominal O.D :	3.1mm
Color :	Black, White, Red, Green
Filler	
Material :	Rip Cord
Sheath	
Material :	FR PVC
Nominal O.D :	9.8mm
Color :	Violet
PHYSICAL PROPERTIES	
Min. Bend Radius	98mm
Operating Temperature	-15°C to 90°C
ELECTRICAL PROPERTIES	
Max. Conductor DC Resistance @ 20°C	9.6Ω/km
Voltage test : Core to Core	1000V a.c/1min

APPLICABLE STANDARD

CM / CL3
EU RoHS Compliant