


PRODUCT SPECIFICATION

DESCRIPTION

Stranded Plain Annealed Copper Wire, 4 Cores,
FR PVC Insulation, Rip Cord, FR PVC Sheath.
CM / CL3 compliant

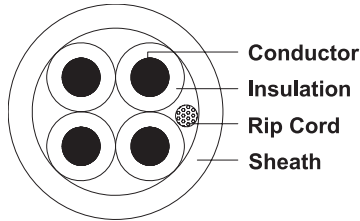

CONSTRUCTION

Conductor	
Material :	Plain Annealed Copper Wire
Size :	16AWG
Construction :	Stranded (65/0.16mm)
Insulation	
Material :	FR PVC
Nominal O.D :	2.3mm
Color :	Black, White, Red, Green
Filler	
Material :	Rip Cord
Sheath	
Material :	FR PVC
Nominal O.D :	6.7mm
Color :	Violet
PHYSICAL PROPERTIES	
Min. Bend Radius	67mm
Operating Temperature	-15°C to 90°C
ELECTRICAL PROPERTIES	
Max. Conductor DC Resistance @ 20°C	14.8Ω/km
Voltage test : Core to Core	1000V a.c/1min

APPLICABLE STANDARD

CM / CL3
EU RoHS Compliant