



## IFS-402GSM

4x 10/100Base-TX+ 2x 100/1000Base-X SFP

## IFS-803GSM

8x 10/100Base-TX+ 3x 100/1000Base-X SFP

This series models are managed industrial grade gigabit switches with 4~16 10/100Base-TX ports and 2~4 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. The switches support a variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple  $\mu$ -Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking, security automation applications, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

### Feature

- 4x 10/100Base-TX RJ-45 and 2 x 100/1000Base-X SFP Fiber (IFS-402GSM)
- 8x 10/100Base-TX RJ-45 and 3 x 100/1000Base-X SFP Fiber (IFS-803GSM)
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostic, Measuring cable normal or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power Consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 instances that each can support  $\mu$ -Ring, u-Chain or Sub-Ring type for flexible uses (see Figure 7). Supports up to 5 rings in one device (see Figure 5).
- $\mu$ -Ring for Redundant Cabling, recovery time < 10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid case of upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP, IEEE802.1abLLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration tool (Figure 4)
- Supports SmartView for Centralized management (Figure 3)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 devices (Figure 2)

### Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes.
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
	4094 IEEE802.1Q VLAN VID	
<b>VLAN ID</b>		
<b>Switch Architecture</b>	Back-plane (Switching Fabric):	
	4.8Gbps	(IFS-402GSM), 7.6Gbps (IFS-803GSM)
	11.2Gbps	(IFS-1604GSM)
	Full wire-speed	

<b>Data Processing</b>	Store and Forward
<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode
<b>Network Connector</b>	4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP connector (IFS-402GSM) 8x 10/100Base-TX RJ-45 + 3x 100/1000Base-X SFP connector (IFS-803GSM) 16x 10/100Base-TX RJ-45 + 4x 100/1000Base-X SFP connector (IFS-1604GSM) RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support dual speed with DDMI
<b>Console</b>	RS-232 (RJ-45)
<b>Network Cable</b>	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
<b>Protocols</b>	CSMA/CD
<b>Reverse Polarity Protection</b>	Present
<b>Overload Current Protection</b>	Present
<b>CPU Watch Dog</b>	Present
<b>Power Supply</b>	Redundant Dual DC 12/24/48V (9.6~60VDC) Input power (Removable Terminal Block) Provide DC Power JACK adapter cable for external power supply

# Industrial Managed FE Switch

<b>Power Consumption</b>	<b>Input Voltage</b>	<b>IFS-402GSM</b>	<b>IFS-803GSM</b>	<b>IFS-1604GSM</b>
	12VDC	5.7W	6.5W	10.8W
	24VDC	5.8W	7W	10.6W
	48VDC	8.5W	8.6W	12.5W
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) SFP Fiber Per port: Link/Active (Green)			
<b>Jumbo Frame</b>	9.6KB			
<b>IEEE802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
<b>MAC Address Table</b>	8K			
<b>Memory Buffer</b>	512K Bytes for packet buffer			
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay			
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1 A @24VDC			
<b>Removable Terminal Block</b>	Provide 2 redundant power, alarm relay contact, 6 Pin			
<b>Operating Temperature</b>	-10 ~ 60°C (IFS-402GSM, IFS-803GSM, IFS-1604GSM) -40 ~ 75°C (IFS-402GSM-E, IFS-803GSM-E, IFS-1604GSM-E)			
<b>Operating Humidity</b>	5% to 95% (Non-condensing)			
<b>Storage Temperature</b>	-40 ~ 85°C			
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless			
<b>Dimensions</b>	106 x 62.5 x 135 mm (D x W x H) (IFS-402GSM) 106 x 72 x 152 mm (D x W x H) (IFS-803GSM, IFS-1604GSM)			

## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration)
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE802.1d STP IEEE802.1w RSTP IEEE802.1s MSTP
<b>Multiple μ-Ring</b>	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings. (See figure 5, 6, 7) Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
<b>Loop Protection</b>	Present
<b>ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)</b>	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/ Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	Rate in steps :1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
<b>Bandwidth Control for Egress</b>	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
<b>DiffServ (RF 2474) Remark</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast

<b>Weight</b>	0.715kg (IFS-402GSM), 0.79kg (IFS-803GSM) 0.82kg (IFS-1604GSM)
<b>Installation Mounting</b>	DIN Rail mounting or wall mounting
<b>MTBF</b>	321,556hrs (IFS-402GSM) 409,312hrs (IFS-803GSM) 145,967hrs (IFS-1604GSM) (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE EN55022 Class A
<b>Railway Traffic</b>	EN50121-4
<b>Traffic control</b>	NEMA TS2 (IFS-402GSM, IFS-803GSM)
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	UL60950-1
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

### IP Multicasting Features

<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
----------------------------	--

### Security Features

<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4

### RADIUS authentication & accounting TACACS+ authentication & accounting, TACACS+ 3.0 HTTPS, HTTP

### SSL / SSH v2

<b>User Name</b>	Local Authentication
<b>Password Authentication</b>	Remote Authentication (via RADIUS / TACACS+)
<b>Management Interface Access Filtering</b>	Web, Telnet / SSH , CLI RS-232 console

### Management Features

<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Server
<b>SNMP</b>	V1, V2c, V3
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP
<b>RMON</b>	Redundant firmware in case of upgrade failure
<b>MIB</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>UPnP</b>	
<b>DHCP</b>	RFC1213 MIB II, Private MIB
	Server, Client, Relay, Snooping Snooping option 82 Relay option 82

### IP Source Guard

<b>Port Mirroring</b>	
<b>Event Syslog</b>	Syslog server (RFC3164) (Support 1 server )
<b>Warning Message</b>	System syslog, e-mail, alarm relay
<b>DNS</b>	Client, Proxy
<b>IEEE1588 PTP V2</b>	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave

NTP  
LLDP (IEEE 802.1ab) Link Layer Discovery Protocol  
LLDP-MED

## IPv6 Features

IPv6 Management Telnet Server/ICMP v6  
SNMP over IPv6  
HTTP over IPv6  
SSH over IPv6

IPv6 Telnet Support

IPv6 NTP Support

IPv6 TFTP Support

IPv6 QoS


IPv6 ACL

Number of rules: up to 256 entries


L2 / L3 / L4

## Application

► Figure 1 : Application Example

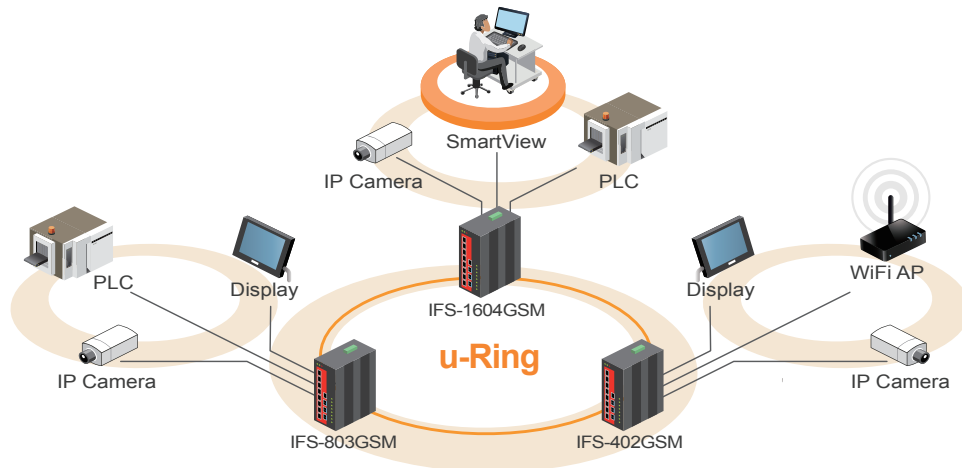


► Figure 2 : Central EMS allows central management of up to 50 SmartView™ servers

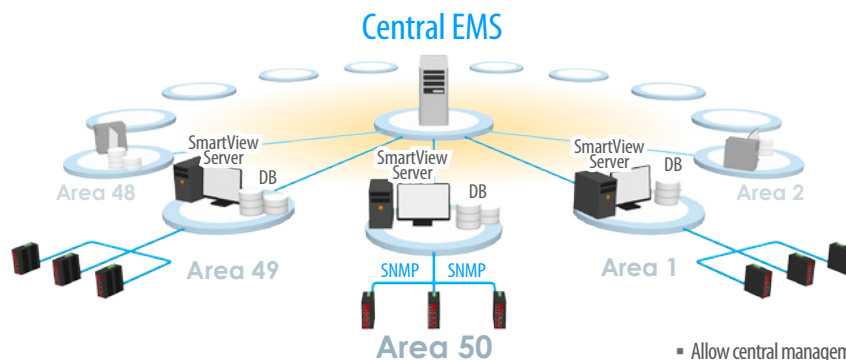


- Allow central management of up to 50 SmartView™ servers
- Allow up to 25,000 devices management
- Hierarchical Network Management Architecture
- Easy and rapid expansion of SmartView™ EMS

► Figure 3 : SmartView™

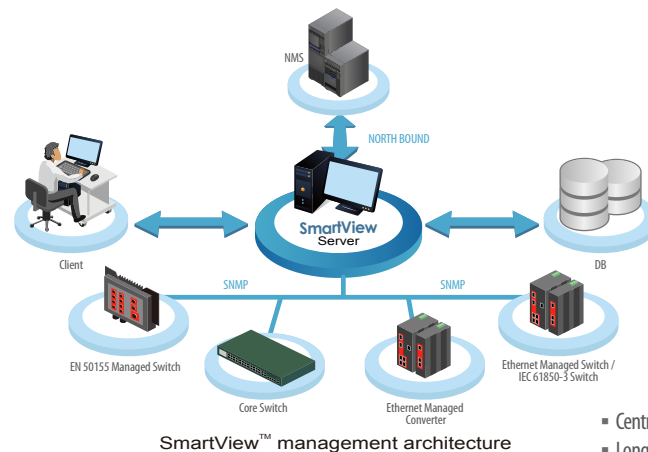


- Centralized Network Management Platform
- Long term events storage (up to 1 year)
- Alarm trap and event log management
- Real-time visual representations
- Remote access control
- Traffic/performance monitoring and management

► **Figure 4 :** SmartConfig™ is a convenient configuration tool for mass deployment of switch products

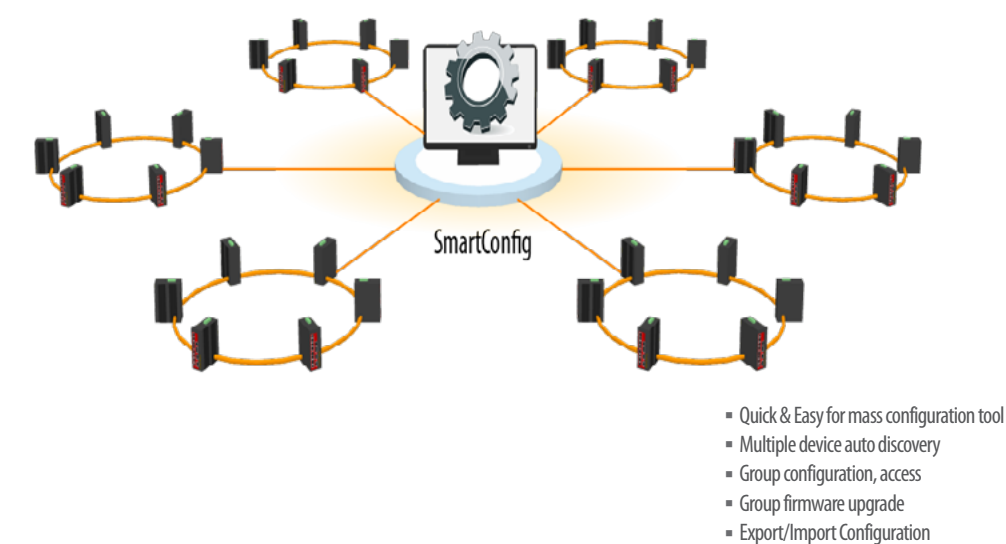

► **Figure 5 :** Multiple  $\mu$ -Ring

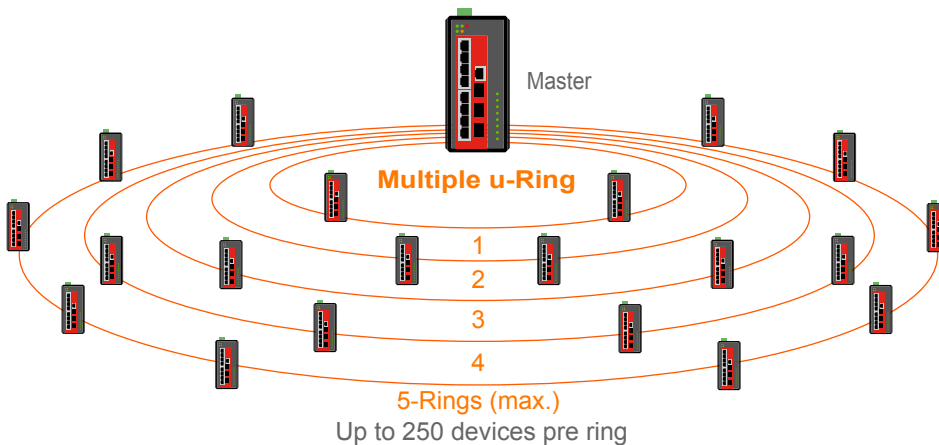


► **Figure 6 :** Friendly to set  $\mu$ -Ring configuration in Web

u-Ring Configuration								Auto-refresh <input type="checkbox"/>	Refresh
Delete	Instance	Type	Master	East		West			
				Port	Edge	Port	Edge		
Delete	1	u-Ring ▼	<input type="checkbox"/>	1 ▼		2 ▼			
Delete	2	u-Ring ▼	<input type="checkbox"/>	4 ▼		3 ▼			
Delete	3	u-Ring ▼	<input type="checkbox"/>	10 (Fiber2) ▼		11 (Fiber3) ▼			
Delete	4	Sub-Ring ▼	<input type="checkbox"/>	6 ▼					
Delete	5	u-Chain ▼	<input type="checkbox"/>	5 ▼	<input type="checkbox"/>	9 (Fiber1) ▼	<input type="checkbox"/>		

Add New Instance

SaveReset


► **Figure 7 :  $\mu$ -Ring Type**

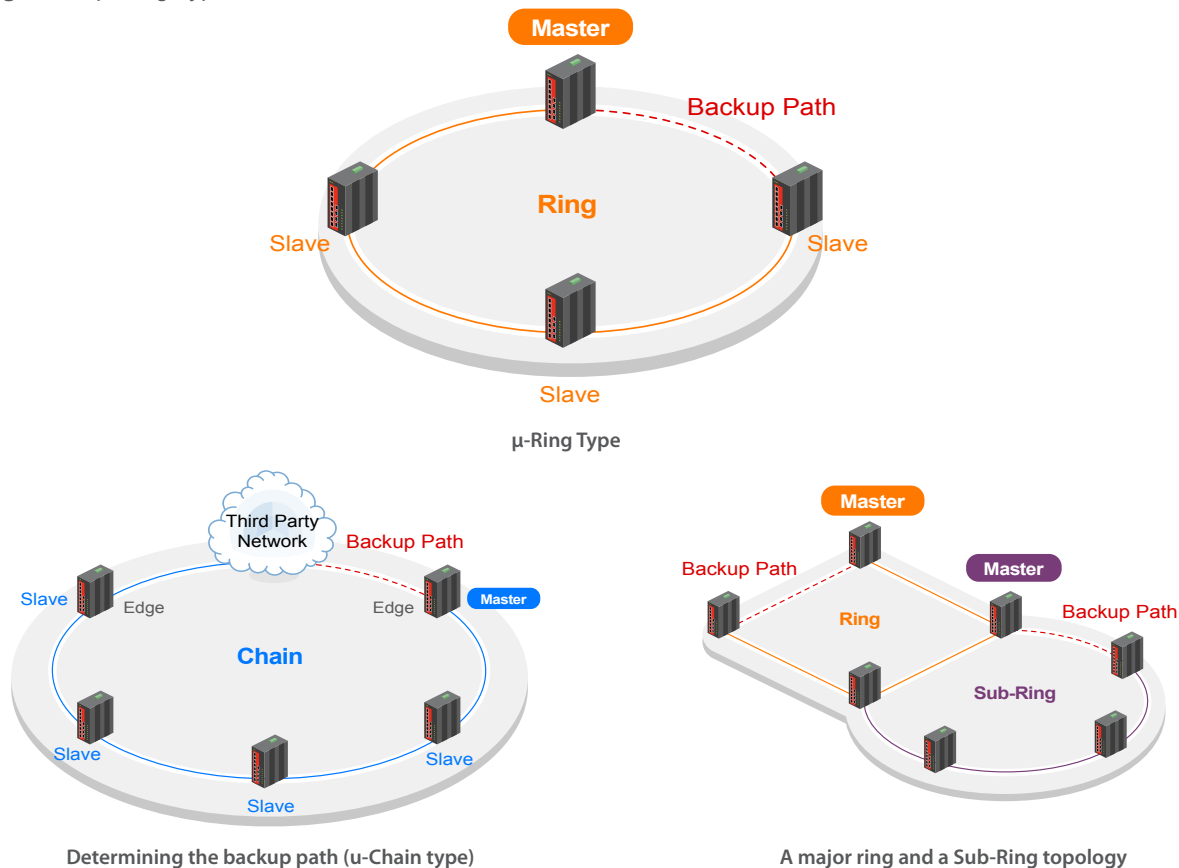


► **Figure 8 : Ring Configuration Example**

Ring Configuration Type


- u-Ring
- Sub-Ring

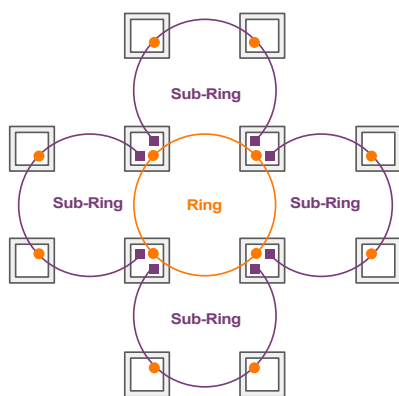


Combination of a ring and four Sub-Ring

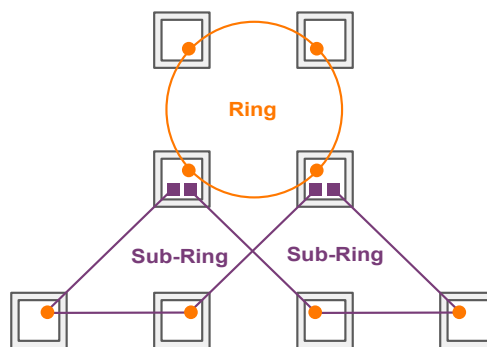

Combination of a ring and two Sub-Ring

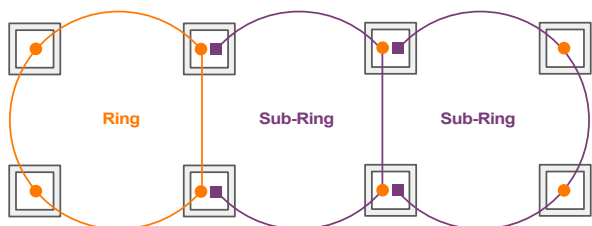


Ring Configuration Type

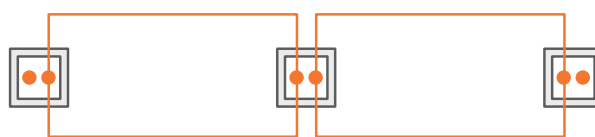


Cable Redundancy

## Dimensions


### ► IFS-402GSM

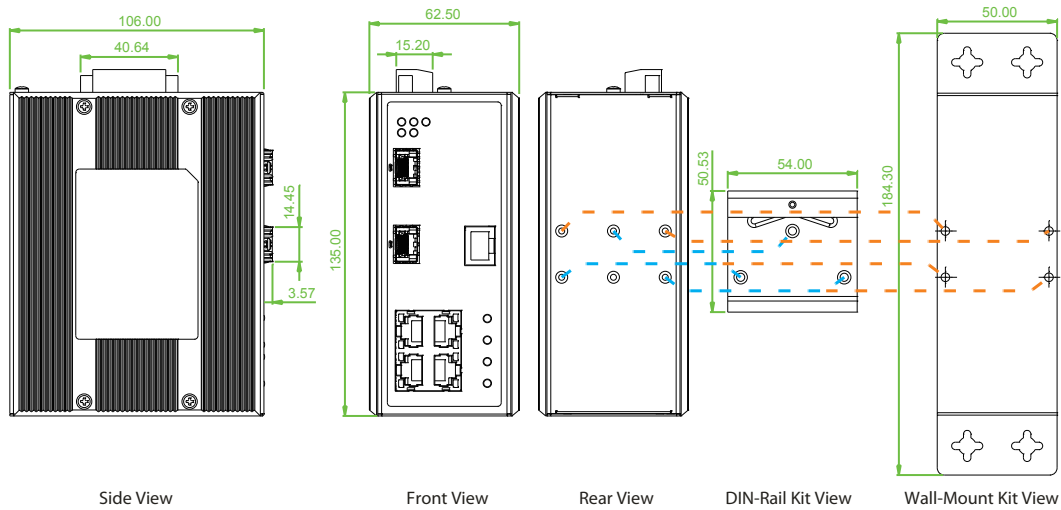

### ► IFS-803GSM

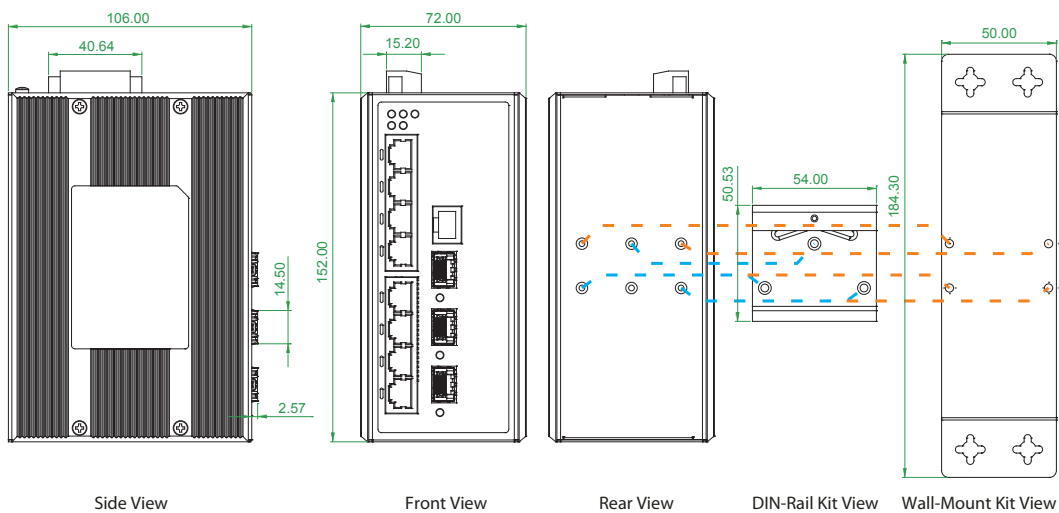


### ► IFS-1604GSM

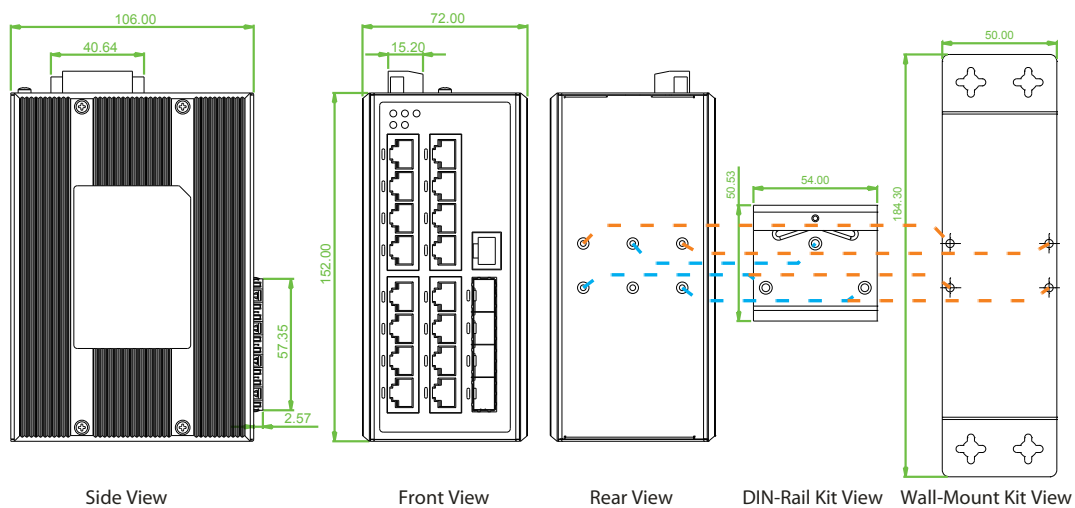

## Ordering Information

Model Name	Managed	Total Port	UTP Port	Fiber Port	Certification					Operating Temperature
			10/100 Base-TX	100/1000 Base-X	Railway EN50121-4	NEMA TS 2	Safety UL60950-1	EN61000-6-2 EN61000-6-4	CE FCC	
IFS-402GSM	V	6	4	2 SFP	V	V	V	V	V	-10~60°C
IFS-402GSM-E	V	6	4	2 SFP	V	V	V	V	V	-40~75°C
IFS-803GSM	V	11	8	3 SFP	V	V	V	V	V	-10~60°C
IFS-803GSM-E	V	11	8	3 SFP	V	V	V	V	V	-40~75°C
IFS-1604GSM	V	20	16	4 SFP	V		V	V	V	-10~60°C
IFS-1604GSM-E	V	20	16	4 SFP	V		V	V	V	-40~75°C

## Model Naming Rule

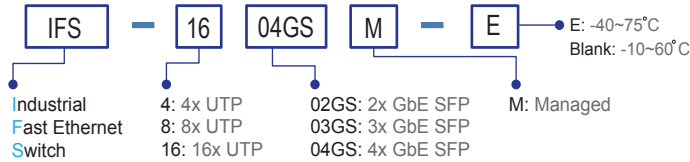

## Optional Accessories

## Industrial Power Supply


DR-4524	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C
MDR-40-24	Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C

## Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)  
(Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T3T00-MA-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Master, -10~70°C (-40~85°C)
ISFP-T3T00-SL-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Slave, -10~70°C (-40~85°C)

## SFP Naming Rule

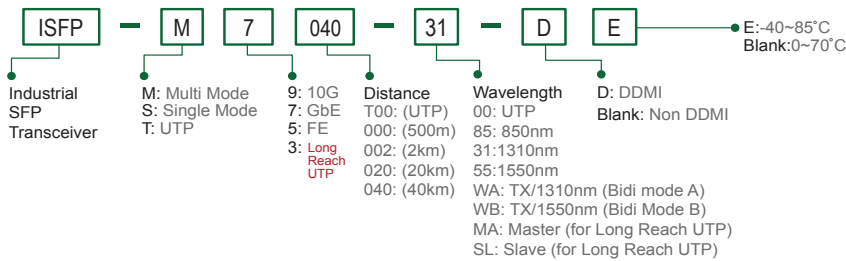

## Package List

- One device of the series
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Wall mount bracket with screws
- Terminal block
- Protective caps for SFP ports
- DC power jack adapter cable