

9" 1U Fibre Distribution Tray-Three Slot

PPPR24S



The Optical Distribution Frame (ODF) Rotary 1U panel is made of plastic ABS material and cold rolled steel pivotal bracket. An innovative high-density pivot panel designed to accept up to 24 SC simplex footprint adapters. The panel can pivot by up to 110° to allow easy access during installation or rework with no disturbance of the existing cable or fibres.

FEATURES:

- Holds up to 24 SC simplex footprint adapters
- Accepts loose tube, distribution and pre-terminated cables
- Designed for 19" standard distribution frame

APPLICATIONS

- Telecommunications subscriber
- Fibre to the home (FTTH)
- LAN/WAN
- CATV
- Indoor application

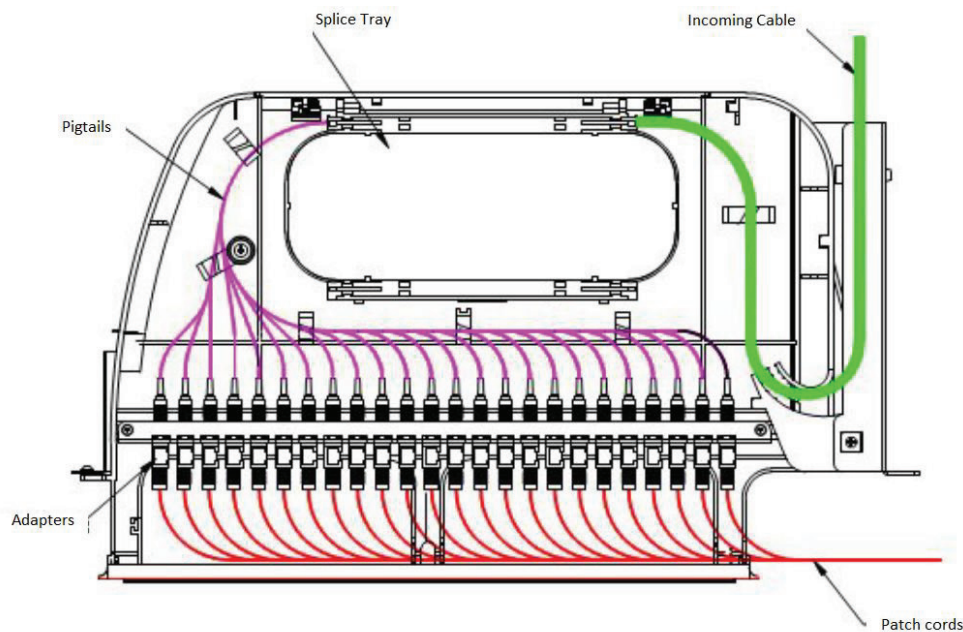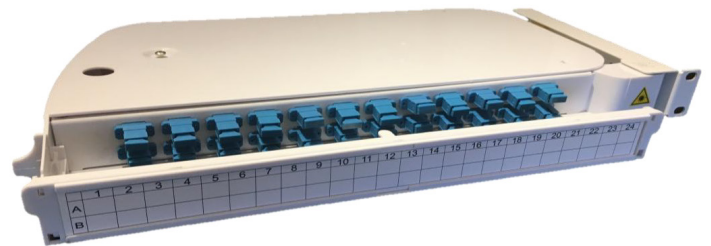

SPECIFICATIONS

Mounting Type	Rack 19"
Height Unit	1U
Material	Material ABS plastic body and cold rolled steel bracket
Housing Colour	White
Application	Indoor IP20
Lockable	No
Dimensions (W x D x H)	482 x 280.40 x 44mm
Net Weight	2kg
Opening Type	Right or left pivotal panel
Access Type	Front access
Front Cable Management	Front manager with hinged drop down bar
Cable Entry Direction	Sides
Rear Cable Management	6 x cable entries
Slot Type	SC Simplex /LC Duplex adapters footprint
Number of Slots	24
Fiber Capacity	24 in SC and LC