

# CAT6A UTP MODULAR PLUGS


## DESCRIPTION

DYNAMIX Cat6 RJ45 modular plugs are perfect for terminating cat6/6A stranded cables. These modular plugs are manufactured from high-impact clear polycarbonate to withstand everyday wear and tear, and the contacts are 50 micron gold for optimum signal transmission.



## FEATURES

- RJ45 Cat6A UTP Modular Plug
- 8 Position 8 Contacts
- Gold 50µ Contacts
- Corrosion resistant gold plated connectors
- Fits Solid & Stranded Round Cable
- Polycarbonate body construction
- Transparent colour
- ROHS compliant

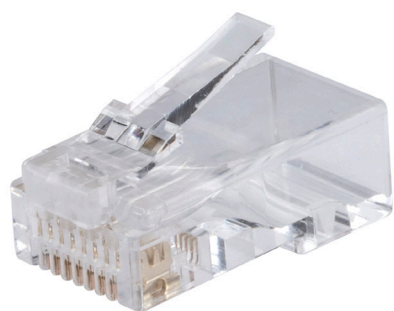

| PRODUCT CODE     | DESCRIPTION   | QUANTITY | COLOUR |
|------------------|---|----------|--------|
| RJ-45-C6AUTP-20  | Cat6/6A UTP RJ45 Plug For Solid And Stranded Cable, 20 Piece Bag  | 20       | Clear  |
| RJ-45-C6AUTP-JAR | Cat6/6A UTP RJ45 Plug For Solid And Stranded Cable, 100 piece Jar | 100      | Clear  |

## SPECIFICATIONS

|                                    |                                |
|------------------------------------|--------------------------------|
| Operation                          | -40°C-+85°C                    |
| Rated Current                      | 125V AC, 1.5A@25°C             |
| Contact Resistance                 | 20mQ Max                       |
| Insulation Resistance              | 500MΩ Min, 100V DC/Min         |
| Voltage Proof                      | 1000V AC/1 minute no breakdown |
| Insertion Force & Withdrawal Force | 30N Max                        |
| Outer Wire                         | 23-26AWG                       |
| Inner Wire                         | OD 1.05-1.20                   |

## ALSO AVAILABLE:

### RJ-45-C6R2-20



Cat6 RJ45 Plug 20pc Bag, 8P8C 2 Piece Modular Plug (Rounded Stranded), 50 micron

### RJ-45-C6SR2-20



Cat6 RJ45 Plug 20pc Bag, 8P8C 2 Piece Modular Plug (Rounded Solid), 50 micron

### RJ-45-C6SR2-20



RJ45 Cat6/6A 23AWG Solid Shielded Round Modular Plug, 20pc Bag.

### SRS-C65-20



Cat6 RJ45 Plug 20pc Bag, 8P8C 2 Piece Modular Plug (Rounded Stranded), 50 micron

Please note we took the up-most care to compile the information in this datasheet. To the best of our knowledge all info provided were correct at the time of creation. Should any specs change we try to update info accordingly. Information are subject to change without notice. In the case that you find any irregularity please inform our team at [contactus@dynamix.co.nz](mailto:contactus@dynamix.co.nz)

Last updated: 21 February 2020