DYNAMIX™
SEISMIC SERIES

SEISMIC SERVER CABINET
SEISMIC SERIES 19"
NETWORK SERVER CABINET

FEATURES:

- Fully welded frame
- Supplied with cage nuts
- Static loading: 1050kg
- Removable two piece side panels
- Ships fully assembled
- Supplied standard with bi-fold pantry style front and rear mesh vented doors
- Front and rear doors are lockable
- Vertical uprights adjustable forward/backward in 1/4 inch increments
- Textured powder coat finish
- Material: SPCC quality cold rolled steel
- Thickness: Mounting profile 2.0mm, front and rear doors 1.2mm, side panels 1.5mm, frame top and bottom cover 3.0mm, reinforcing 6.0mm
- 2 Year Warranty on cabinet. Subject to use within the static loading specifications and operation within normal environmental conditions
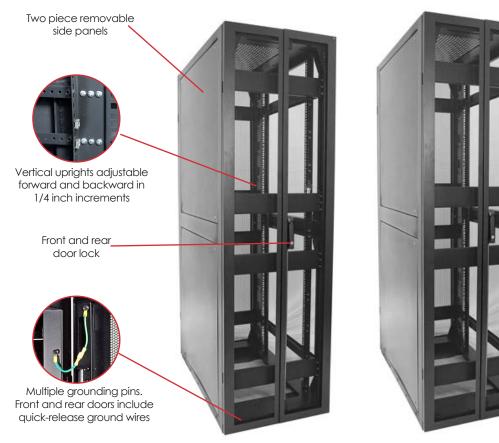
MODEL CODE	W X D X H (EXTERNAL)	CAPACITY	INCLUDES	M3	KG
RSS42-6X10	600 x 1000 x 2000mm	42RU	25x Cage Nuts	1.54	190
RSS42-6X12	600 x 1200 x 2000mm	42RU	25x Cage Nuts	1.84	200
RSS42-8X8	800 x 800 x 2000mm	42RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	1.90	210
RSS42-8X10	800 x 1000 x 2000mm	42RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	1.99	215
RSS42-8X12	800 x 1200 x 2000mm	42RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	2.37	225
RSS45-6X10	600 x 1000 x 2133mm	45RU	25x Cage Nuts	1.63	200
RSS45-6X12	600 x 1200 x 2133mm	45RU	25x Cage Nuts	1.95	210
RSS45-8X8	800 x 800 x 2133mm	45RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	2.06	230
RSS45-8X10	800 x 1000 x 2133mm	45RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	2.12	240
RSS45-8X12	800 x 1200 x 2133mm	45RU	Dual 100mm Front Vertical Cable Management, 25x Cage Nuts	2.51	250

SEISMIC SERVER CABINET

SEISMIC SERIES 19"
NETWORK SERVER CABINET

SEISMICALLY TESTED TO THE LATEST TELCORDIA® GR-63-CORE: ZONE 4, ISSUE 4 STANDARD

Two piece removable
side panels

Top cable entry

Vertical uprights adjustable
forward and backward in
1/4 inch increments

RU markings on front and
rear mounting rails

Front and rear
door lock

Multiple grounding pins.
Front and rear doors include
quick-release ground wires

Flexible mounting
holes front and rear
of steel floor plate

CABINET FRONT VIEW

CABINET REAR VIEW